

NS5 Series

NARROW STRIP


Job Title : _____
 Fixture Type : _____
 Catalog No. : _____
 Notes : _____

DESCRIPTION

- A high quality all purpose narrow strip in a one lamp cross section, offered in a variety of T5 configurations.

HOUSING

- Heavy duty die formed 20 gauge steel housing.
- Snap in socket end plates.
- Slide on ballast cover with tool less retention.
- Knockouts for mounting, conduit feed, cord sets, or continuous row.

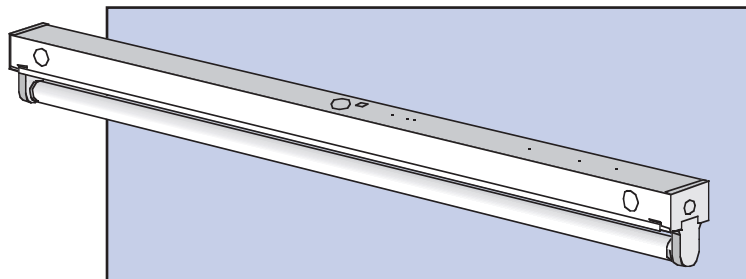


MOUNTING

- Fixtures designed for surface, stem or chain suspension.
- Can be installed as individual units or in continuous row mounting.

BALLAST

- Thermally protected, resetting, Class P, HPF, non-PCB, UL listed, CSA-certified ballast is standard.
- Rapid start ballasts are sound rated A+.
- Premium T5 lamp with enhanced phosphors and 85 CRI.
- Ballast/lamp efficacy up to 100+LPW.
- 0.95 ballast factor standard for typical applications. 1.15 ballast factor available for higher ceiling height applications.
- Step-dimming option allows system to be switched to 50% power for compliance with common energy codes.



WIRING & ELECTRICAL

- Fixture conforms to UL 1598 and is suitable for damp locations.
- AWM, TFN or THHN wire used throughout, rated for required temperatures.

CROSS SECTION

A : 1 3/8"
 B : 1 3/8"

FINISH

- Iron-phosphate pretreatment ensures superior paint adhesion and rust resistance.
- Painted parts finished with high-gloss, baked white enamel.

WARRANTY/LISTINGS

- Suitable for damp locations.
- All units are UL listed and labeled accordingly.


ORDERING GUIDE Example: NS5114PPN120-EM55

Prefix	# Lamps	Lamp	Ballast Style (select one)	Voltage	Factory Installed Options
NS5 Individual	1 2	14 (22") T5 21 (34") T5 28 (46") T5 35 (58") T5 24HO (22") 39HO (34") 54HO (46") 80HO (58")	PIN* Performance Instant Start Normal Light Output < 10% THD PPN Performance Programmed Start Normal Light Output < 10% THD PPN Performance Programmed Start Normal Light Output < 10% THD PPNBL ¹ Performance Programmed Start Normal Light Output Bi-Level Switching < 10% THD	120 277 UNV* (120/277)	Dimming Ballast - Consult Factory GLR Internal Fast Blow Fuse GMF Internal Slow Blow Fuse EM55 300 - 700 Lumen EM Pack

¹ PPNBL available only in 54w HO units
 *UNV ballast in PIN only

DIMENSIONS

Individual

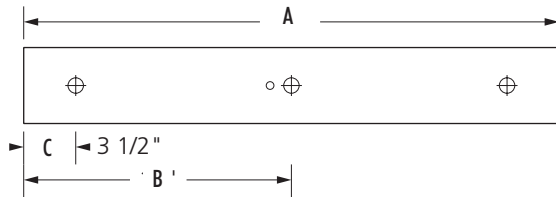

2' Unit	3' Unit	4' Unit	6' Unit
A = 22 7/16"	A = 34 9/32"	A = 46 1/16"	A = 57 13/16"
B = 11 7/32"	B = 7 9/64"	B = 23 1/32"	B = 28 45/64"
C = 1"	C = 1"	C = 1"	C = 1"

Tandem

