

DESCRIPTION

- A high quality all purpose economy strip in a one lamp cross section, offered in a variety of BIAX configurations.

HOUSING

- Heavy duty die formed 20 gauge steel housing.
- Snap in socket end plates.
- Slide on ballast cover with tool less retention.
- Knockouts for mounting, conduit feed, cord sets, or continuous row.

MOUNTING

- Fixtures designed for surface, stem or chain suspension.
- Can be installed as individual units or in continuous row mounting.

BALLAST

- Thermally protected, resetting, Class P, HPF, non-PCB, UL listed, CSA-certified ballast is standard.
- Rapid start ballasts are sound rated A.
- Standard combinations are CBM approved and conform to UL 935.

WIRING & ELECTRICAL



- Fixture conforms to UL 1598 and is suitable for damp locations.
- AWM, TFN or THHN wire used throughout, rated for required temperatures.

FINISH

- Iron-phosphate pretreatment ensures superior paint adhesion and rust resistance.
- Painted parts finished with high-gloss, baked white enamel.

WARRANTY/LISTINGS

- Suitable for damp locations.
- All units are UL listed and labeled accordingly.

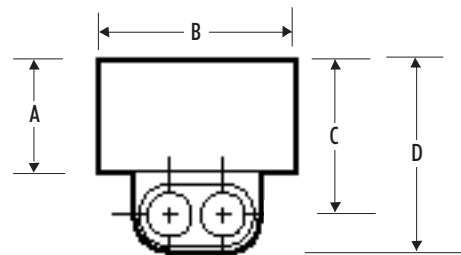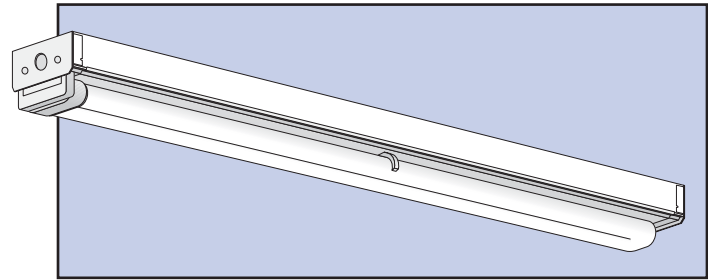

CROSS SECTION

- A : 1 7/8"
 B : 2 3/4"
 C : 2 1/4"
 D : 3 1/8"

ORDERING GUIDE Example: PLS140PIN277-GMF

Prefix	#Lamps	Lamp	Ballast Style (select one)	Voltage	Factory Installed Options
PLS Individual	1	24 (12.9") 36/39 (16.6") 40 (22.6") 50/55 (21.1")	PIN ^{1,3} Performance Instant Start Normal Light Output <10% THD PRN ⁴ Perf. Programmed Rapid Start Normal Light Output <10% THD RSN ² Rapid Start Normal Light Output <20% THD	120 277 UNV ¹ (120/277)	Dimming Ballast - Consult Factory GLR Internal Fast Blow Fuse GMF Internal Slow Blow Fuse EM 300 - 400 Lumen EM Pack EM5 400 - 500 Lumen EM Pack EM7 600 - 700 Lumen EM Pack EM11 1100 Lumen EM Pack EM14 1400 Lumen EM Pack

¹ UNV ballast in PIN only.


² RSN for use with 36/39w, 40w, and 50/55w units.

³ PIN for use with 40w units only.

⁴ PRN for use with 24w, 36/39w, 40w, 50/55w units

DIMENSIONS

Individual

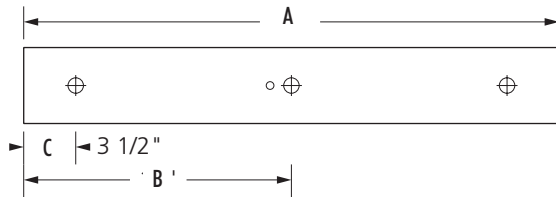

15" Unit	18" Unit	2' Unit	3 Unit	4' Unit
A = 15"	A = 18"	A = 24"	A = 36"	A = 48"
B = 7 1/2"	B = 9"	B = 12"	B = 18"	B = 24"
C = 2 1/8"	C = 2 1/8"	C = 2 1/8"	C = 2 1/8"	C = 2 1/8"

Tandem

