

### DESCRIPTION

- A high quality all purpose economy strip in a three or four lamp. cross section, offered in a variety of T8 configurations.

### HOUSING

- Heavy duty die formed 20 gauge steel housing.
- Snap in socket end plates.
- Slide on ballast cover with tool less retention.
- Knockouts for mounting, conduit feed, cord sets, or continuous row.

### MOUNTING

- Fixtures designed for surface, stem or chain suspension.
- Can be installed as individual units or in continuous row mounting.

### BALLAST

- Thermally protected, resetting, Class P, HPF, non-PCB, UL listed, CSA-certified ballast is standard.
- Rapid start ballasts are sound rated A.
- Standard combinations are CBM approved and conform to UL 935.

### WIRING & ELECTRICAL




- Fixture conforms to UL 1598 and is suitable for damp locations.
- AWM, TFN or THHN wire used throughout, rated for required temperatures.

### FINISH

- Iron-phosphate pretreatment ensures superior paint adhesion and rust resistance.
- Painted parts finished with high-gloss, baked white enamel.

### WARRANTY/LISTINGS

- Suitable for damp locations.
- All units are UL listed and labeled accordingly.

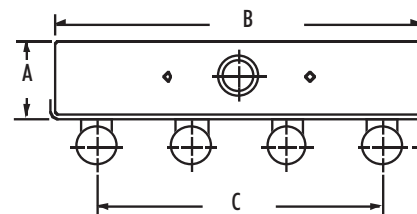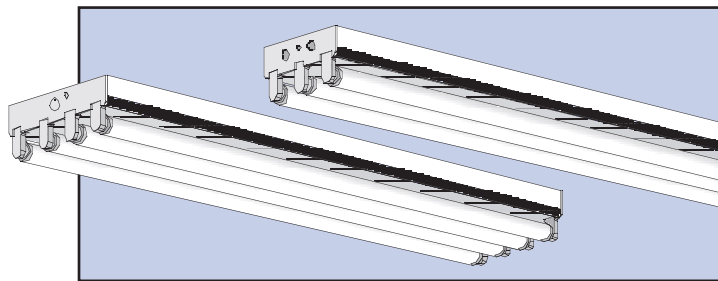

### CROSS SECTION

3 LAMP	4 LAMP
A : 2 7/8"	A : 2 7/8"
B : 8 9/16"	B : 8 9/16"
C : 4 1/2"	C : 6 3/42"


### ORDERING GUIDE Example: WS5314PPN120-EM55

Prefix	#Lamps	Lamp	Ballast Style (select one)	Voltage	Factory Installed Options
WS5 Individual	3	14(22") T5	<b>PIN*</b> Performance Instant Start Normal Light Output <10% THD  <b>PPN</b> Performance Programmed Start Normal Light Output <10% THD	<b>120</b> <b>277</b> <b>UNV*</b> (120/277)	Dimming Ballast - Consult Factory  <b>GLR</b> Internal Fast Blow Fuse  <b>GMF</b> Internal Slow Blow Fuse  <b>EM55</b> 300 - 700 Lumen EM Pack
	4	21(34") T5 28(46") T5 35(58") T5			
		24HO(22") 39HO(34") 54HO(46") 80HO(58")	<b>PPN</b> Performance Programmed Start Normal Light Output <10% THD  <b>PPNBL<sup>1</sup></b> Performance Programmed Start Normal Light Output Bi-Level Switching <10% THD		

<sup>1</sup> PPNBL available only in 54w HO units  
\*UNV ballast in PIN only

### DIMENSIONS

#### Individual

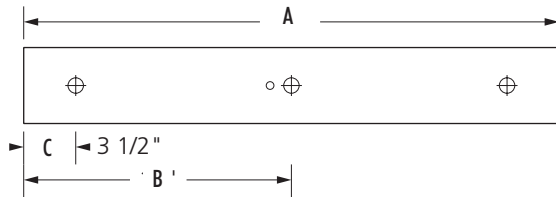

2' Unit	3' Unit	4' Unit	6' Unit
A = 24"	A = 36"	A = 48"	A = 72"
B = 12"	B = 18"	B = 24"	B = 36"
C = 5"	C = 5"	C = 5"	C = 5"

#### Tandem

