
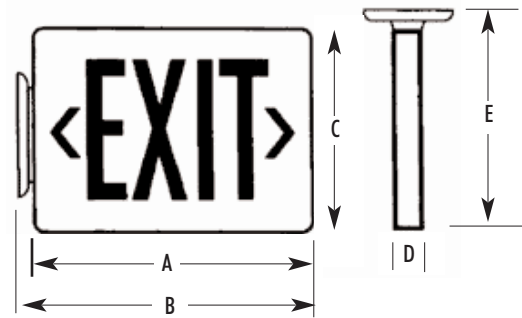


**Product Description**

The Thermo-P Exit-Ous Series of thermoplastic LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in an economical package. Premium features such as snap-fit canopy & housing, and knock-out chevrons make the Thermo-P Series a real value.

**Product Specifications**

- Injection molded UV stabilized thermoplastic
- UL94V-O flame retardant housing
- Impact, scratch, and fade resistant
- Durable unibody housing frame
- Integral wiring channel
- Single or double face applications
- White or black textured finish
- Dual voltage 120/277VAC
- Rated for use in damp locations
- Optional 2 circuit versions to comply with local codes
- AC or battery backup
- Maintenance-free nickel cadmium battery
- Long life, energy saving LED lamps
- \* Red or green LED letters
- May be top, back or end mounted
- Field knock-out chevrons

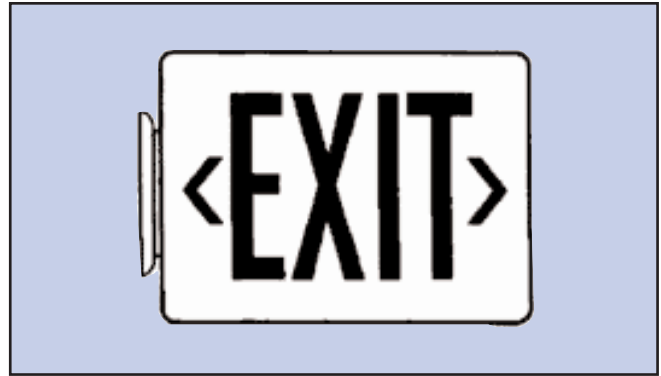

**Product Listings**

- UL /CUL listed
- UL /CUL listed, rated for damp locations (except optional SD versions)
- ETL Listed
- NFPA101
- NEC/OSHA
- Energy Star compliant

**CROSS SECTION**

- A : 12 1/4"
- B : 13"
- C : 7 1/2"
- D : 1 3/4"
- E : 8 1/4"

**Warranty**

- 5 year limited warranty

**ORDERING GUIDE** Example: TPU2GWEMSD – PCS1

Prefix	Mounting	Faces	LED Color	Housing Color	Mode	Options	Accessories
<b>TP</b>	<b>U</b> Universal	<b>2</b> Two Included	<b>G</b> Green <b>R</b> Red	<b>W</b> White <b>B</b> Black	<b>Blank</b> AC Only  <b>EM</b> AC with Emergency Battery Backup	<b>SD</b> Self Diagnostics & Testing  <b>TC</b> Two Circuit	<b>PCS1*</b> Polycarbonate Shield  <b>PCS2*</b> Polycarbonate Shield  <b>WG*</b> Wireguard

\* NOTE: Wall mounted units only.