

Product Description

The Thermo-P Combo Series of thermoplastic LED Exit/EM Signs offer long lamp life, energy efficiency and uniform illumination in an economical package. Premium features such as snap-fit canopy & housing, and knock-out chevrons make the Thermo-P Combo Series an unsurpassed value.

Product Specifications

- Injection molded UV stabilized thermoplastic
- UL94V-O flame retardant housing
- Impact, scratch, and fade resistant
- Durable unibody housing frame
- Integral wiring channel
- Single or double face applications
- White or black textured finish
- Dual voltage 120/277VAC
- Includes two 6V, 5.4w rotating lighting heads
- Optional 2 circuit versions to comply with local codes
- Low voltage disconnect
- AC and battery backup
- Maintenance-free sealed lead calcium battery
- Long life, energy saving LED lamps
- May be top, back or end mounted
- Field knock-out chevrons

Product Listings



- UL/CUL listed
- UL/CUL listed, rated for damp location (except optional SD versions)
- ETL Listed
- NFPA 101
- NEC/OSHA
- Energy Star compliant

Warranty

- 5 year limited warranty

ORDERING GUIDE Example: TPCU2GWEMSD – WG2

Prefix	Mounting	Faces	LED Color	Housing Color	Mode	Options	Accessories
TPC	U Universal	2 Two Included	G Green R Red	W White B Black	EM AC with Emergency Battery Backup	SD Self Diagnostics & Testing	WG2* Wireguard Shield

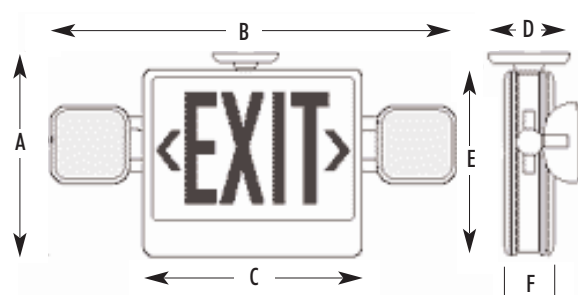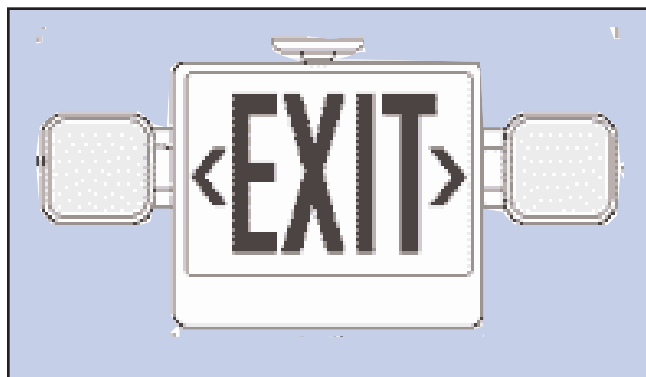

CROSS SECTION

- A : 11"
- B : 22"
- C : 13"
- D : 5"
- E : 10"
- F : 2 3/4"

* NOTE: Wall mounted units only.