
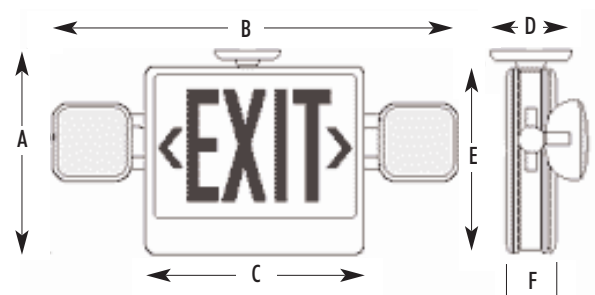


Product Description

The Thermo-P Exit-Ous/Emergen-See Combo Series of thermoplastic LED Exit/EM Signs offer remote capability, long lamp life, energy efficiency and uniform illumination in an economical package.

Product Specifications

- Injection molded UV stabilized thermoplastic
- UL94V-O flame retardant housing
- Impact, scratch, and fade resistant
- Single or double face applications
- White or black textured finish
- Universal mounting plate with quick connects
- Completely self contained electronics
- Fully automatic operation
- Sealed, maintenance-free lead calcium battery
- Easily accessible push to test switch
- Clearly visible charge rate/power on LED indicator
- Automatic Low Voltage Disconnect
- Remote capability to 15w
- Dual voltage 120/277 volt
- Long life, energy saving LED lamps
- Includes two 6V, 5.4w lighting heads
- Suitable for Wall or Ceiling mounting over standard J-box
- Field knock-out chevrons

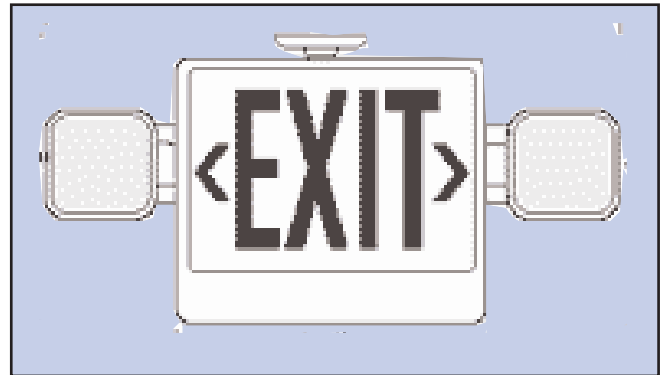

Product Listings

- UL/CUL listed
- UL/CUL listed, rated for damp location (except optional SD versions)
- ETL Listed
- NFPA101
- NEC/OSHA

Warranty

- 5 year limited warranty

ORDERING GUIDE Example: TPCRU2GWEMSD – WG2

Prefix	Mounting	Faces	LED Color	Housing Color	Mode	Options	Accessories
TPCR	U Universal	2 Two Included	G Green R Red	W White B Black	EM AC with Emergency Battery Backup	SD Self Diagnostics & Testing	WG2* Wireguard Shield

CROSS SECTION

- A : 11"
- B : 22"
- C : 13"
- D : 5"
- E : 10"
- F : 2 3/4"

* NOTE: Wall mounted units only.